


SONY TR-824

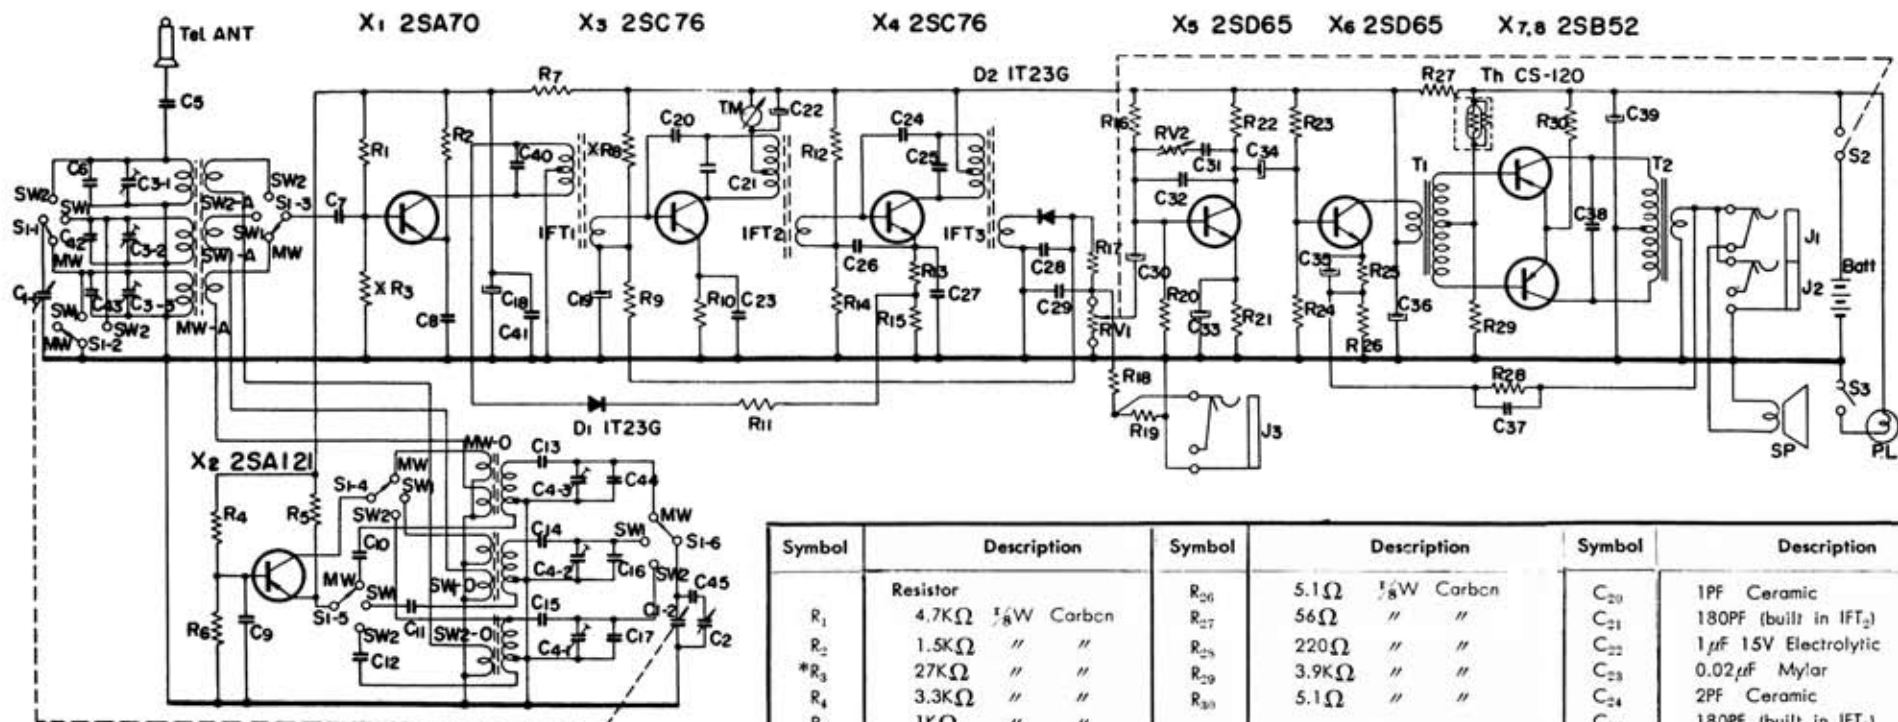

Symbol	Description	Symbol	Description
R ₁	4.7KΩ 1/8W Carbon	R ₂₆	5.1Ω 1/8W Carbon
R ₂	1.5KΩ " "	R ₂₇	56Ω " "
*R ₃	27KΩ " "	R ₂₈	220Ω " "
R ₄	3.3KΩ " "	R ₂₉	3.9KΩ " "
R ₅	1KΩ " "	R ₃₀	5.1Ω " "
R ₆	15KΩ " "	Capacitor	
R ₇	330Ω " "	C ₁₋₁₋₂	Tuning Capacitor, 2 gang
*R ₈	56KΩ " "	C ₂	Fine Tuning Capacitor
R ₉	5.6KΩ " "	C ₃₋₁₋₃	Trimmer Capacitor, 3 unit
R ₁₀	470Ω " "	C ₄₋₁₋₃	" "
R ₁₁	1KΩ " "	C ₅	20PF Ceramic
R ₁₂	22KΩ " "	C ₆	30PF "
R ₁₃	330Ω " "	C ₇	0.01μF "
R ₁₄	3.3KΩ " "	C ₈	0.005μF Ceramic
R ₁₅	150Ω " "	C ₉	0.02μF "
R ₁₆	12KΩ " "	C ₁₀	0.01μF Mylar
R ₁₇	470Ω " "	C ₁₁	0.001μF "
R ₁₈	91KΩ " "	C ₁₂	200PF Ceramic
R ₁₉	2.2KΩ " "	C ₁₃	330PF Styrol
R ₂₀	3.3KΩ " "	C ₁₄	2200PF "
R ₂₁	390Ω " "	C ₁₅	6800PF "
R ₂₂	1.2KΩ " "	C ₁₆	10PF Ceramic
R ₂₃	5.1KΩ " "	C ₁₇	25PF "
R ₂₄	2.2KΩ " "	C ₁₈	100μF 6V Electrolytic
R ₂₅	220Ω " "	C ₁₉	10μF 6V "
C ₂₀	1PF Ceramic	C ₂₀	1PF Ceramic
C ₂₁	180PF (built in IFT ₂)	C ₂₁	180PF (built in IFT ₂)
C ₂₂	1μF 15V Electrolytic	C ₂₂	1μF 15V Electrolytic
C ₂₃	0.02μF Mylar	C ₂₃	0.02μF Mylar
C ₂₄	2PF Ceramic	C ₂₄	2PF Ceramic
C ₂₅	180PF (built in IFT ₃)	C ₂₅	180PF (built in IFT ₃)
C ₂₆	0.02μF Mylar	C ₂₆	0.02μF Mylar
C ₂₇	0.02μF "	C ₂₇	0.02μF "
C ₂₈	0.01μF "	C ₂₈	0.01μF "
C ₂₉	0.01μF "	C ₂₉	0.01μF "
C ₃₀	30μF 3V Electrolytic	C ₃₀	30μF 3V Electrolytic
C ₃₁	0.05μF Mylar	C ₃₁	0.05μF Mylar
C ₃₂	0.002μF "	C ₃₂	0.002μF "
C ₃₃	50μF 3V Electrolytic	C ₃₃	50μF 3V Electrolytic
C ₃₄	30μF 6V "	C ₃₄	30μF 6V "
C ₃₅	50μF 3V "	C ₃₅	50μF 3V "
C ₃₆	100μF 6V "	C ₃₆	100μF 6V "
C ₃₇	0.02μF Mylar	C ₃₇	0.02μF Mylar
C ₃₈	0.1μF "	C ₃₈	0.1μF "
C ₃₉	100μF 6V Electrolytic	C ₃₉	100μF 6V Electrolytic
C ₄₀	180PF (built in IFT ₁)	C ₄₀	180PF (built in IFT ₁)
C ₄₁	0.05μF Ceramic	C ₄₁	0.05μF Ceramic
C ₄₂	15PF "	C ₄₂	15PF "
C ₄₃	5PF "	C ₄₃	5PF "
C ₄₄	5PF "	C ₄₄	5PF "
C ₄₅	5PF "	C ₄₅	5PF "