


SONY TR-835

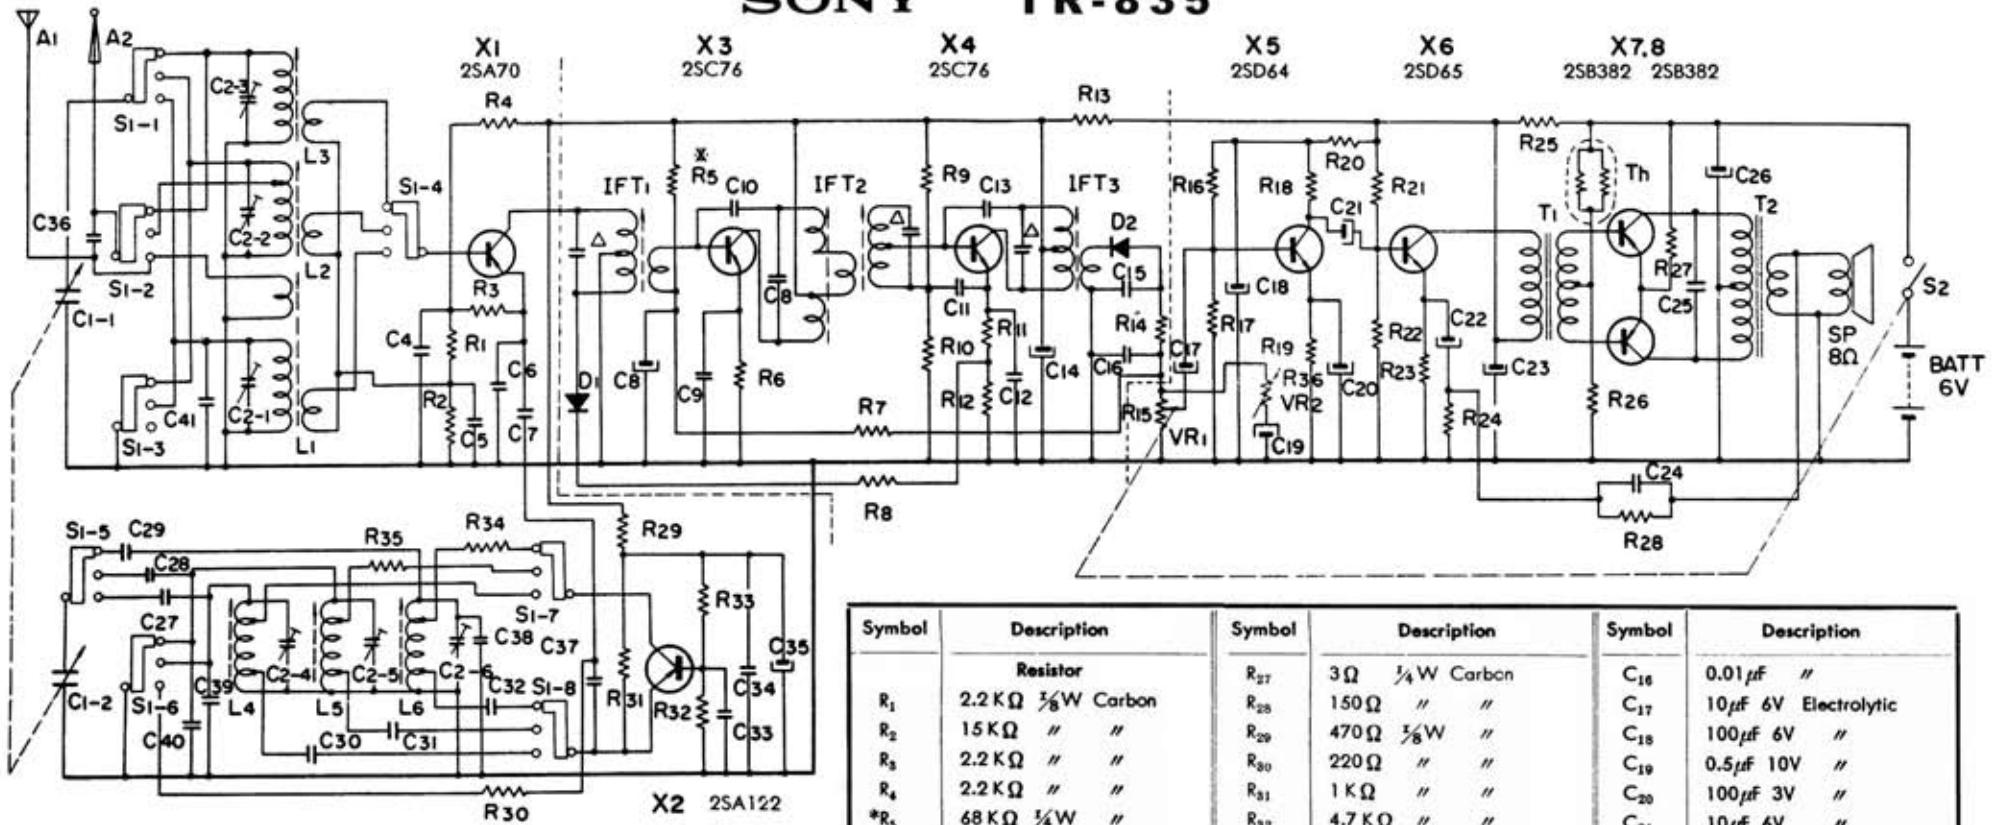

Symbol	Description	Symbol	Description	Symbol	Description
Resistor					
R ₁	2.2 KΩ 1/8 W Carbon	R ₂₇	3 Ω 1/4 W Carbon	C ₁₆	0.01 μF "
R ₂	15 KΩ " "	R ₂₈	150 Ω " "	C ₁₇	10 μF 6V Electrolytic
R ₃	2.2 KΩ " "	R ₂₉	470 Ω 1/8 W "	C ₁₈	100 μF 6V "
R ₄	2.2 KΩ " "	R ₃₀	220 Ω " "	C ₁₉	0.5 μF 10V "
*R ₅	68 KΩ 1/4 W "	R ₃₁	1 KΩ " "	C ₂₀	100 μF 3V "
R ₆	470 Ω " "	R ₃₂	4.7 KΩ " "	C ₂₁	10 μF 6V "
R ₇	5.6 KΩ " "	R ₃₃	3.3 KΩ " "	C ₂₂	100 μF 3V "
R ₈	3.3 KΩ " "	R ₃₄	220 Ω " "	C ₂₃	100 μF 6V "
R ₉	22 KΩ " "	R ₃₅	220 Ω " "	C ₂₄	0.047 μF Mylar
R ₁₀	3.3 KΩ " "	R ₃₆	5 KΩ Tone Control	C ₂₅	0.3 μF 250V MP
R ₁₁	62 Ω " "	Capacitor			
R ₁₂	220 Ω " "	C ₁	Tuning Capacitor, 2 gang	C ₂₆	100 μF 6V Electrolytic
R ₁₃	100 Ω " "	C ₂	Trimmer Capacitor, 3 unit	C ₂₇	330PF Styrol
R ₁₄	470 Ω " "	C ₃	—deleted—	C ₂₈	1400PF "
R ₁₅	5 KΩ Volume Control	C ₄	0.02 μF Ceramic	C ₂₉	4500PF "
R ₁₆	15 KΩ 1/4 W Carbon	C ₅	0.02 μF "	C ₃₀	0.02 μF Ceramic
R ₁₇	4.3 KΩ " "	C ₆	50PF "	C ₃₁	0.005 μF "
R ₁₈	2 KΩ " "	C ₇	0.02 μF "	C ₃₂	600PF "
R ₁₉	1 KΩ " "	C ₈	10 μF 6V Electrolytic	C ₃₃	0.02 μF "
R ₂₀	560 Ω " "	C ₉	0.02 μF Ceramic	C ₃₄	0.02 μF "
R ₂₁	6.8 KΩ " "	C ₁₀	1PF "	C ₃₅	30 μF 6V Electrolytic
R ₂₂	3.3 KΩ " "	C ₁₁	0.02 μF "	C ₃₆	10PF Ceramic
R ₂₃	220 Ω " "	C ₁₂	0.02 μF "	C ₃₇	0.002 μF "
R ₂₄	5.1 Ω " "	C ₁₃	3PF "	C ₃₈	10PF "
R ₂₅	68 Ω " "	C ₁₄	100 μF 6V Electrolytic	C ₃₉	15PF "
R ₂₆	2.2 KΩ " "	C ₁₅	0.01 μF Ceramic	C ₄₀	10PF "
				C ₄₁	5PF "