


SONY TR-816Y

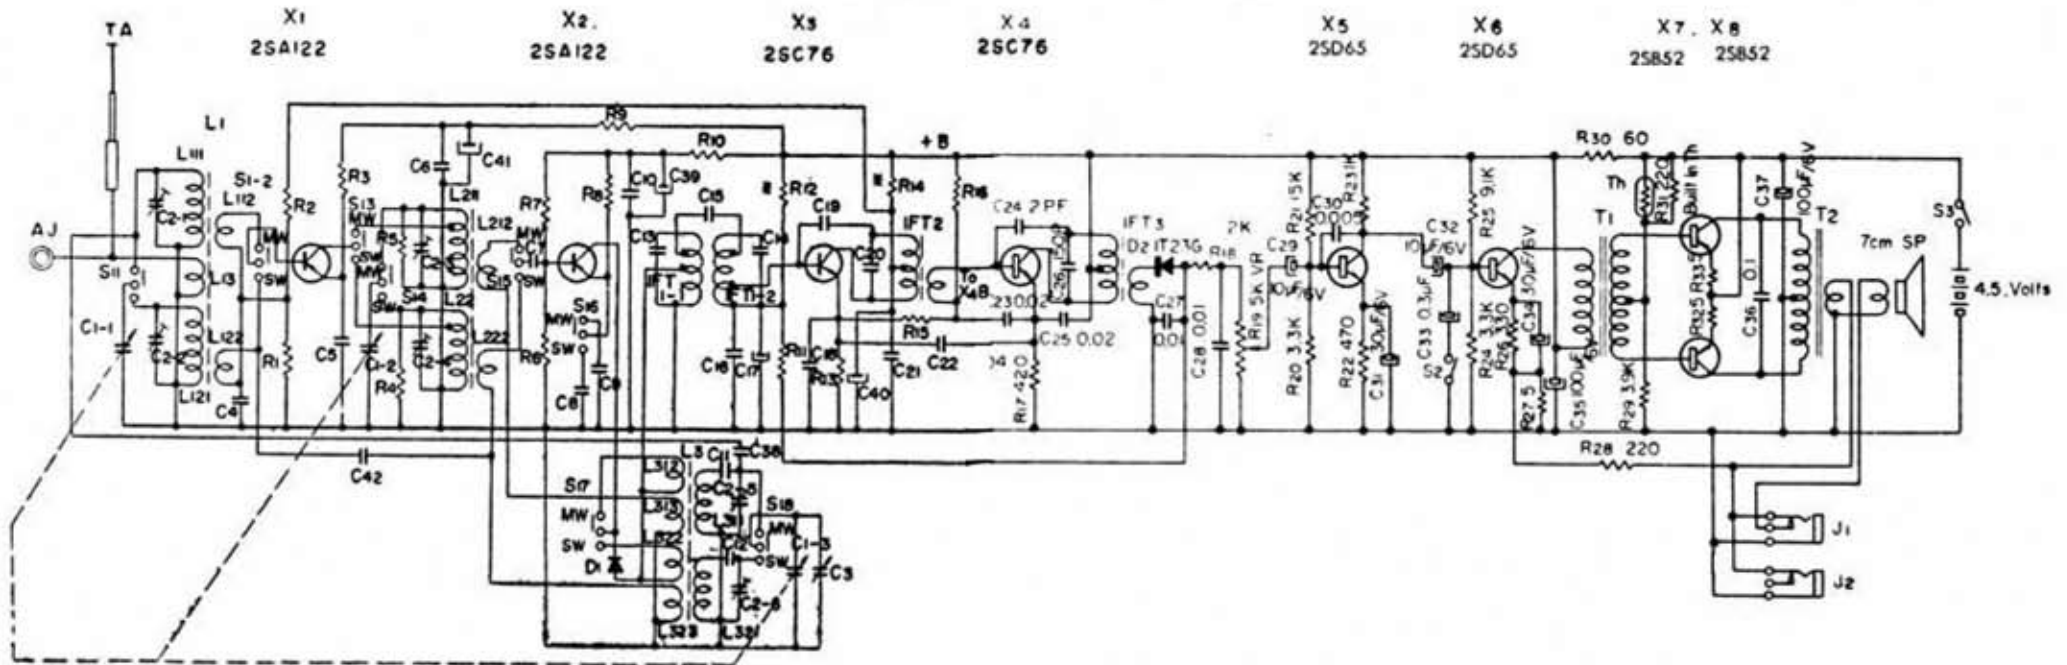

Symbol	Description	Symbol	Description	Symbol	Description
R ₁	Carbon Resistor 100 KΩ RD 1/2 ±5%	R ₂₅	Carbon Resistor 9.1 KΩ RD 1/2 RL ±5%	C ₁₈	" 2 PF ±0.5 PF Ceramic
R ₂	" 1120 KΩ " 1	R ₂₆	" 330 Ω " "	C ₁₉	" 150 PF built in IFT
R ₃	" 1.0 KΩ " "	R ₂₇	" 5.1 Ω " "	C ₂₀	" 0.02 jf ±20% Mylar
R ₄	" 17.5 KΩ " 1	R ₂₈	" 220 Ω RD 1/2 ±5%	C ₂₁	" 10.04 jf " 1
R ₅	" 1.0 KΩ RD 1/2 ±5%	R ₂₉	" 3.9 KΩ RD 1/2 RL ±5%	C ₂₂	" 0.04 jf ±100% Ceramic
R ₆	" 3.3 KΩ RD 1/2 RL ±5%	R ₃₀	" 62 Ω " "	C ₂₃	" 0.02 jf ±20% Mylar
R ₇	" 115 KΩ " 1	R ₃₁	—deleted—	C ₂₄	" 2 PF ±0.5 PF Ceramic
R ₈	" 10 KΩ " "	R ₃₂	Carbon Resistor 5.1 Ω RD 1/2 RL ±5%	C ₂₅	" 0.02 jf ±20% Mylar
R ₉	" 133 KΩ " 1	R ₃₃	" 5.1 Ω " "	C ₂₆	" 150 PF built in IFT
R ₁₀	" 8.2 KΩ " "	C ₁₋₁	Tuning Capacitor, 3 gang	C ₂₇	" 0.01 jf ±20% Mylar
R ₁₁	" 4.3 KΩ " "	C ₁₋₂	Trimmer Capacitor, 6 unit	C ₂₈	" 0.01 jf " "
R ₁₂	" 3.3 KΩ " "	C ₁₋₃	Fine Tuning Capacitor	C ₂₉	" 10 jf 6 V Electrolytic
R ₁₃	" 330 Ω " "	C ₁₋₄	Capacitor 0.02 jf ±20% Mylar	C ₃₀	" 0.005 jf ±20% Mylar
R ₁₄	" 1.0 KΩ " "	C ₂	" 0.005 jf " "	C ₃₁	" 30 jf 6 V Electrolytic
R ₁₅	" 10 KΩ " "	C ₃	" 0.02 jf " "	C ₃₂	" 10 jf " "
R ₁₆	" 68 KΩ " "	C ₄	" 10.04 jf " "	C ₃₃	" 0.3 jf 6 V ±100% Alox
R ₁₇	" 470 Ω " "	C ₅	" 0.01 jf " "	C ₃₄	" 30 jf 6 V Electrolytic
R ₁₈	" 1.2 KΩ " "	C ₆	" 0.001 jf " "	C ₃₅	" 100 jf " "
R ₁₉	" 2.2 KΩ " "	C ₇	" 0.002 jf " "	C ₃₆	" 0.1 jf Ceramic
R ₂₀	" 27 KΩ " "	C ₈	" 0.02 jf " "	C ₃₇	" 100 jf 6 V Electrolytic
R ₂₁	" 470 Ω " "	C ₉	" 300 PF ±10% Styrol	C ₃₈	" 3 PF ±0.5 PF Ceramic
R ₂₂	" 470 Ω " "	C ₁₀	" 2000 pf " "	C ₃₉	" 20 PF ±10% Styrol
R ₂₃	" 20 KΩ " "	C ₁₁	" 13000 PF ± 5% 1	C ₄₀	" 130 jf 6 V Electrolytic
R ₂₄	" 13.3 KΩ " 1	C ₁₂	" 150 PF built in IFT	C ₄₁	" 3 PF ±0.5 PF Ceramic
R ₂₅	Volume Control	C ₁₃	" 150 PF built in IFT	C ₄₂	" (30 jf 6 V Electrolytic)
R ₂₆	Carbon Resistor 3.3 KΩ RD 1/2 RL ±5%	C ₁₄	" 10 PF ±1 PF Ceramic	C ₄₃	" 30 jf " "
R ₂₇	" 15 KΩ " "	C ₁₅	" 0.02 jf ±20% Mylar	C ₄₄	—deleted—
R ₂₈	" 470 Ω " "	C ₁₆	" 30 jf 6 V Electrolytic	C ₄₅	" 13 PF ±0.5 PF Ceramic
R ₂₉	" 1.0 KΩ " "	C ₁₇	" 0.04 jf ±20% Mylar	C ₄₆	Capacitor 1 jf 6 V Electrolytic
R ₃₀	" 3.3 KΩ " "	C ₁₈	" 10.02 jf " 1		