


SONY TR-818

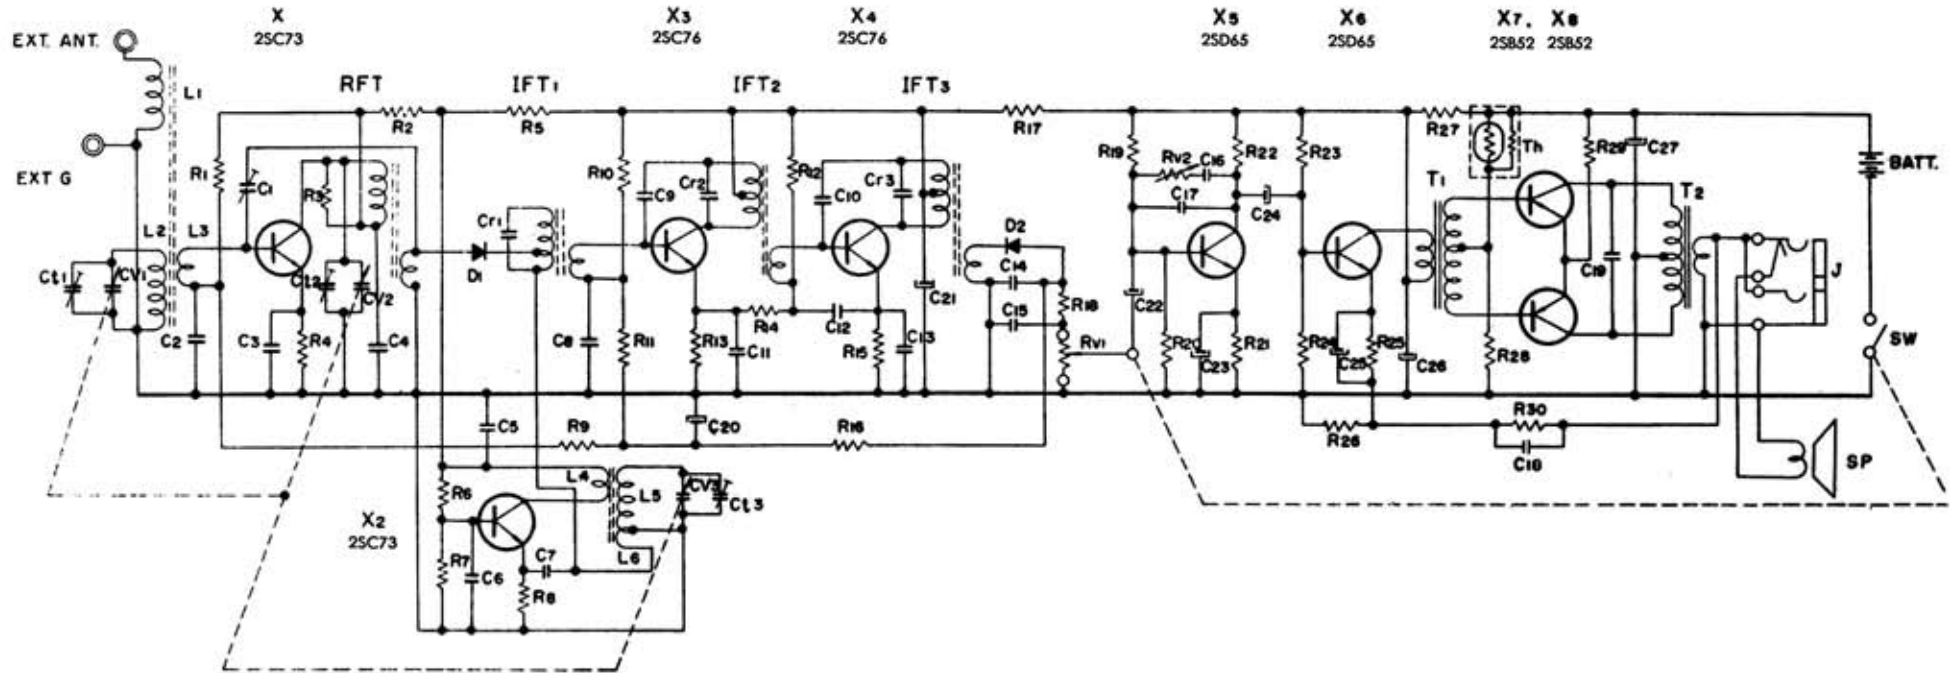

Symbol	Description	Symbol	Description	Symbol	Description
R ₁	Carbon Resistor 500 KΩ RD 3/8 RL ±5%	R ₂₁	Carbon Resistor 560 KΩ RD 3/8 RL ±5%	C ₉	Capacitor 2 pF ±0.5 P Ceramic
R ₂	220 Ω	R ₂₂	1.0 KΩ	C ₁₀	2 pF " "
R ₃	500 KΩ	R ₂₃	6.2 KΩ	C ₁₁	0.04 μF ±100% Mylar
R ₄	680 Ω	R ₂₄	2.2 KΩ	C ₁₂	0.04 μF " "
R ₅	220 Ω	R ₂₅	220 Ω	C ₁₃	0.04 μF " "
R ₆	56 KΩ	R ₂₆	10 Ω	C ₁₄	0.01 μF " "
R ₇	12 KΩ	R ₂₇	60 Ω	C ₁₅	0.01 μF " "
R ₈	1.0 KΩ	R ₂₈	3.3 KΩ	C ₁₆	0.05 μF ±20% "
R ₉	2.2 KΩ	R ₂₉	5.1 Ω	C ₁₇	0.002 μF " "
*R ₁₀	62 KΩ	R ₃₀	220 Ω	C ₁₈	0.02 μF " "
R ₁₁	3.3 KΩ	CV _{1,2,3}	Tuning Capacitor 3 gang	C ₁₉	0.1 μF " "
R ₁₂	27 KΩ	C ₁	Cylindrical Capacitor	C ₂₀	10 μF 3 V ±100% Electrolytic
R ₁₃	470 Ω	C ₂	Capacitor	C ₂₁	100 μF 6 V " "
R ₁₄	1.5 KΩ	C ₃	0.04 μF ±100% Mylar	C ₂₂	30 μF 3 V " "
R ₁₅	470 Ω	C ₄	0.01 μF " "	C ₂₃	50 μF 3 V " "
R ₁₆	5.6 KΩ	C ₅	0.04 μF " "	C ₂₄	30 μF 6 V " "
R ₁₇	220 Ω	C ₆	0.02 μF ±20% "	C ₂₅	50 μF 3 V " "
R ₁₈	470 Ω	C ₇	0.002 μF " "	C ₂₆	100 μF 6 V " "
R ₁₉	8.2 KΩ	C ₈	0.04 μF ±100% "	C ₂₇	100 μF 6 V " "
R ₂₀	3.3 KΩ				