


SONY TR-910T

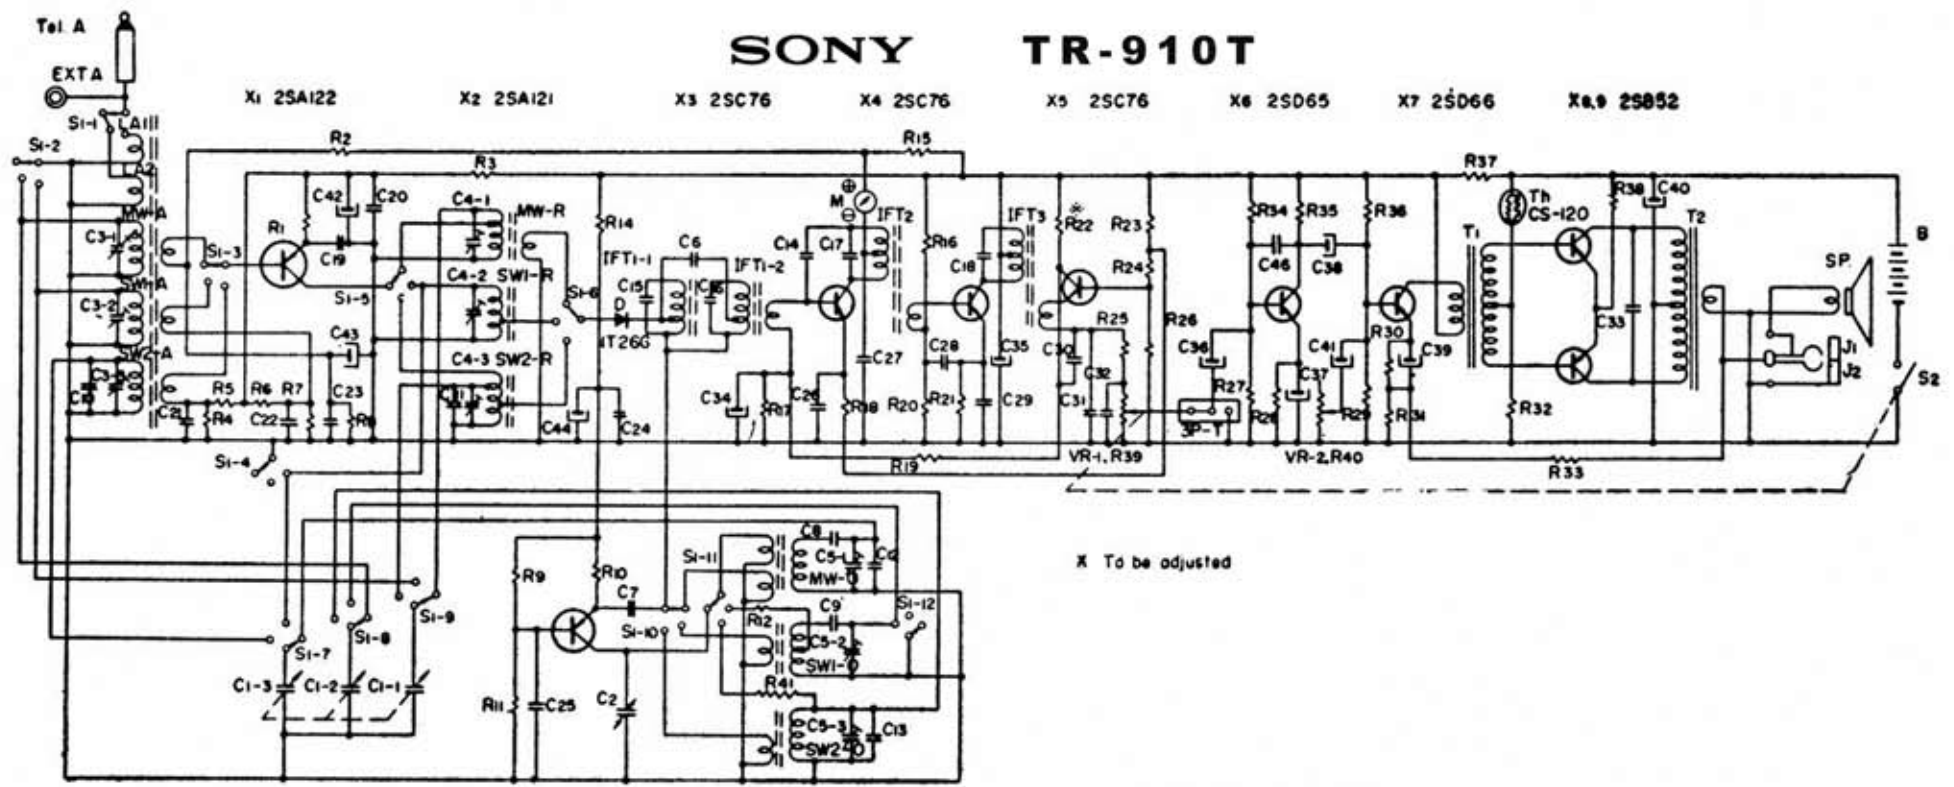

X To be adjusted

| Symbol | Description | Symbol | Description | Symbol | Description |
|-----------------|---------------------------------------|----------------------|--------------------------------------|-----------------|-------------------------|
| R ₁ | Carbon Resistor 2.2 KΩ RD 1/8 RL ± 5% | R ₂₀ | Carbon Resistor 470 Ω " | C ₁₈ | " " " IFT ₁ |
| R ₂ | " 2.2 KΩ " | R ₂₁ | " 3.3 KΩ " | C ₁₉ | " 0.01 μf ±100% Ceramic |
| R ₃ | " 2.2 KΩ " | R ₂₂ | " 470 Ω " | C ₂₀ | " 0.02 μf " " |
| R ₄ | " 15 KΩ " | R ₂₃ | " 5.1 Ω " | C ₂₁ | " 0.01 μf " Ceramic |
| R ₅ | " 10 KΩ " | R ₂₄ | " 4.7 KΩ " | C ₂₂ | " 0.01 μf ±7% " |
| R ₆ | " 10 KΩ " | R ₂₅ | " 220 Ω " | C ₂₃ | " 0.01 μf " " |
| R ₇ | " 51 KΩ " | R ₂₆ | " 33 KΩ " | C ₂₄ | " 0.02 μf ±100% " |
| R ₈ | " 22 KΩ " | R ₂₇ | " 1 KΩ " | C ₂₅ | " 0.02 μf " " |
| R ₉ | " 5.6 KΩ " | R ₂₈ | " 8.2 KΩ " | C ₂₆ | " 0.02 μf " " |
| R ₁₀ | " 2.2 KΩ " | R ₂₉ | " 100 Ω " | C ₂₇ | " 0.02 μf " " |
| R ₁₁ | " 24 KΩ " | R ₃₀ | " 5.1 Ω " | C ₂₈ | " 0.01 μf " " |
| R ₁₂ | " 220 Ω " | | | C ₂₉ | " 0.02 μf " " |
| R ₁₃ | deleted | | | C ₃₀ | " 0.02 μf " " |
| R ₁₄ | Carbon Resistor 1 KΩ RD 1/8 RL ± 5% | C ₁₋₁₋₃ | Tuning Capacitor, 3 gang | C ₃₁ | " 0.005 μf ±10% " |
| R ₁₅ | " 2 KΩ " | C ₂ | Fine Tuning Capacitor | C ₃₂ | " 0.005 μf " " |
| R ₁₆ | " 22 KΩ " | C _{3, 4, 5} | Trimmer Capacitor, 3 unit | C ₃₃ | " 0.005 μf " " |
| R ₁₇ | " 110 KΩ " | C ₆ | Capacitor 700 PF ± 5% Styrol | C ₃₄ | " 0.1 μf ±20% " |
| R ₁₈ | " 470 Ω " | C ₇ | " 1000 PF " " | C ₃₅ | " 10 μf 6V Electrolytic |
| R ₁₉ | " 5.6 KΩ " | C ₈ | " 370 PF " " | C ₃₆ | " 100 μf " " |
| R ₂₀ | " 3.3 KΩ " | C ₉ | " 2500 PF " " | C ₃₇ | " 10 μf " " |
| R ₂₁ | " 470 Ω " | C ₁₀ | " 20 PF " " | C ₃₈ | " 100 μf 3V " " |
| R ₂₂ | " 100 KΩ " | C ₁₁ | " 15 PF ±1 PF Ceramic | C ₃₉ | " 10 μf 6V " " |
| R ₂₃ | " 22 KΩ " | C ₁₂ | " 10 PF " " | C ₄₀ | " 100 μf 3V " " |
| R ₂₄ | " 1.8 KΩ " | C ₁₃ | " 15 PF " " | C ₄₁ | " 100 μf 6V " " |
| R ₂₅ | " 470 Ω " | C ₁₄ | " 2 PF ±0.5 PF " | C ₄₂ | " 0.3 μf " (Alox) |
| R ₂₆ | " 220 Ω " | C ₁₅ | " 150 PF Built in IFT ₁₋₁ | C ₄₃ | " 30 μf 6V " " |
| R ₂₇ | " 5.6 KΩ " | C ₁₆ | " " " IFT ₁₋₂ | C ₄₄ | " 10 μf " " |
| | | C ₁₇ | " " " IFT ₂ | | |