
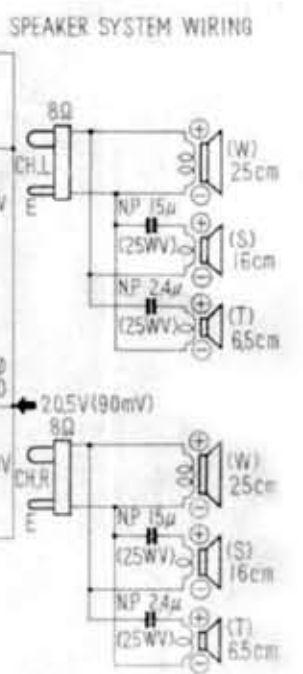
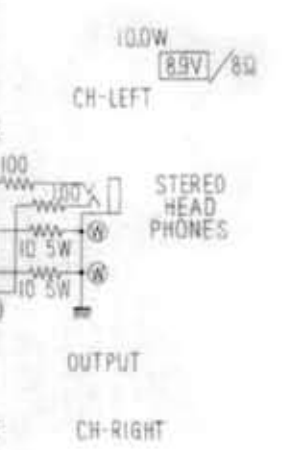


- SELECTOR
 1 FM STEREO
 2 FM MONO
 3 AM
 4 PHONO
 5 TAPE STEREO
 6 TAPE MONO
 SL-1 AFC ON → OFF
 SL-2 LOUDNESS ON → OFF
 SL-3 IMPEDANCE SELECTOR 8Ω → 16Ω
 SL-4 VOLTAGE SELECTOR 100V → 117V
 SL-5 SPEAKER ON → OFF
- VR₁ TREBLE
 VR₂ BASS
 VR₃ VOLUME
 VR₄ HUM BALANCE
 VR₅ FM MPX SEPARATION CONTROL
 SW-1 POWER ON → OFF

- CAPACITORS
 (C) CERAMIC
 (E) ELECTROLYTIC
 (NP) NON MARK—DIL PAPER
 (M) MICA
 (VC) VARIABLE
 (S) STRUOL
- RESISTORS
 (L) L-TYPE CARBON
 (1) 1 WATT
 (2) 2 WATTS
 (Δ) 1/2 WATTS COMPOSITION 20%
 (NON MARK) 1/2 WATTS COMPOSITION 10%
 (▲) 1/2 WATTS COMPOSITION 5%

注
 部品はYEW精密機
 器設計
 電圧はV.T.V.M PM-20による
 ()内はリプル電圧
 □内は入力レベル
 ↑ 満流電圧 無信号時
 ⊕ 満流電流のもの

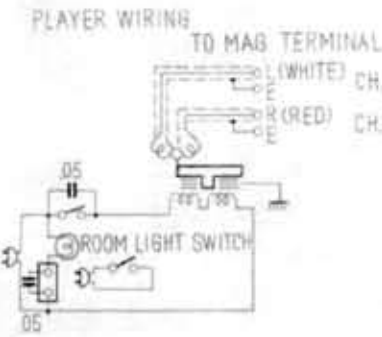

パイオニア S-82X