



Model TR-830

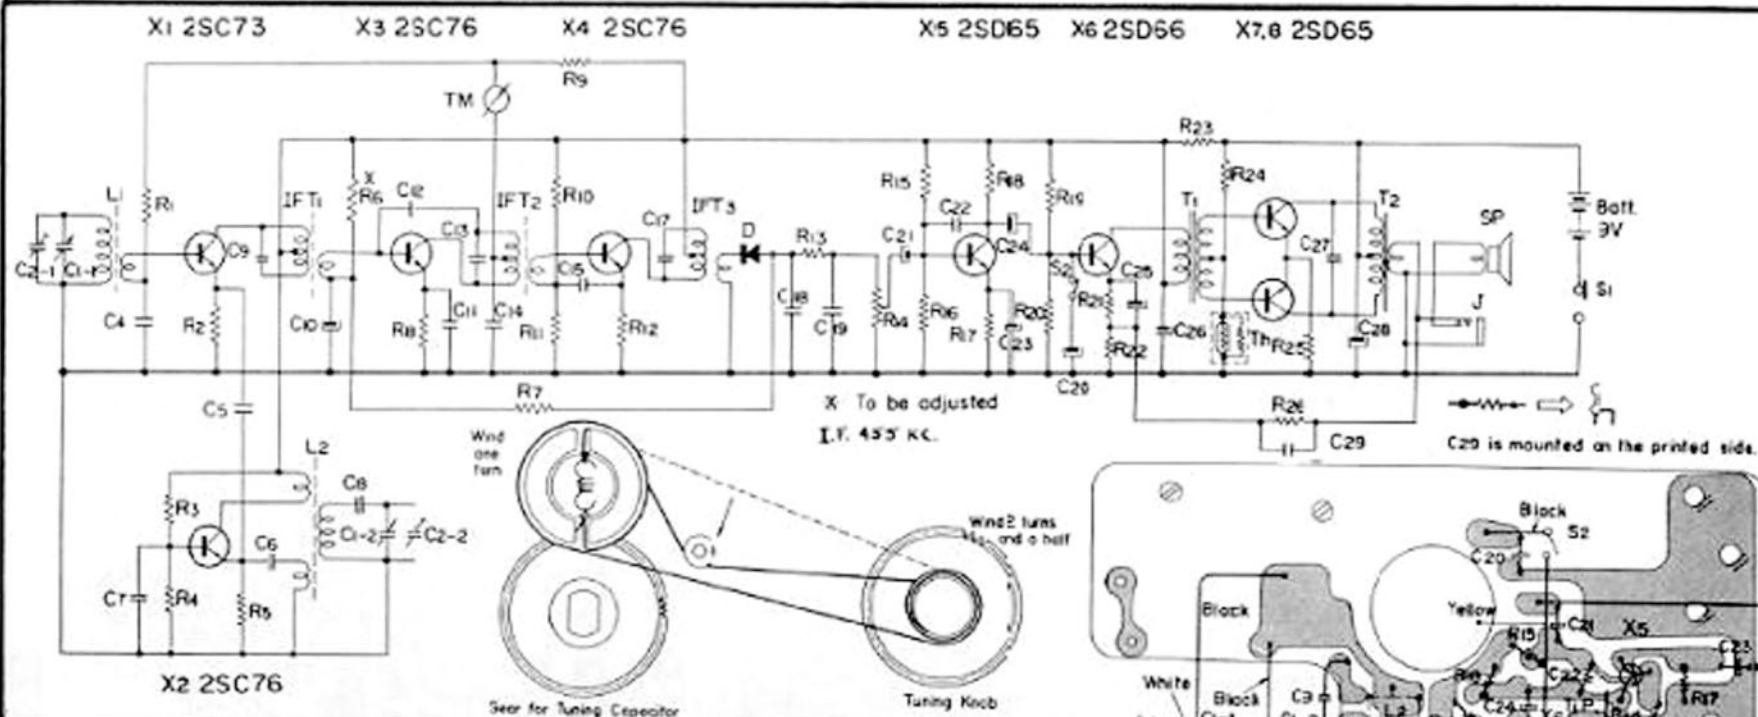

X To be adjusted
 I.F. 455 KC.

C29 is mounted on the printed side.

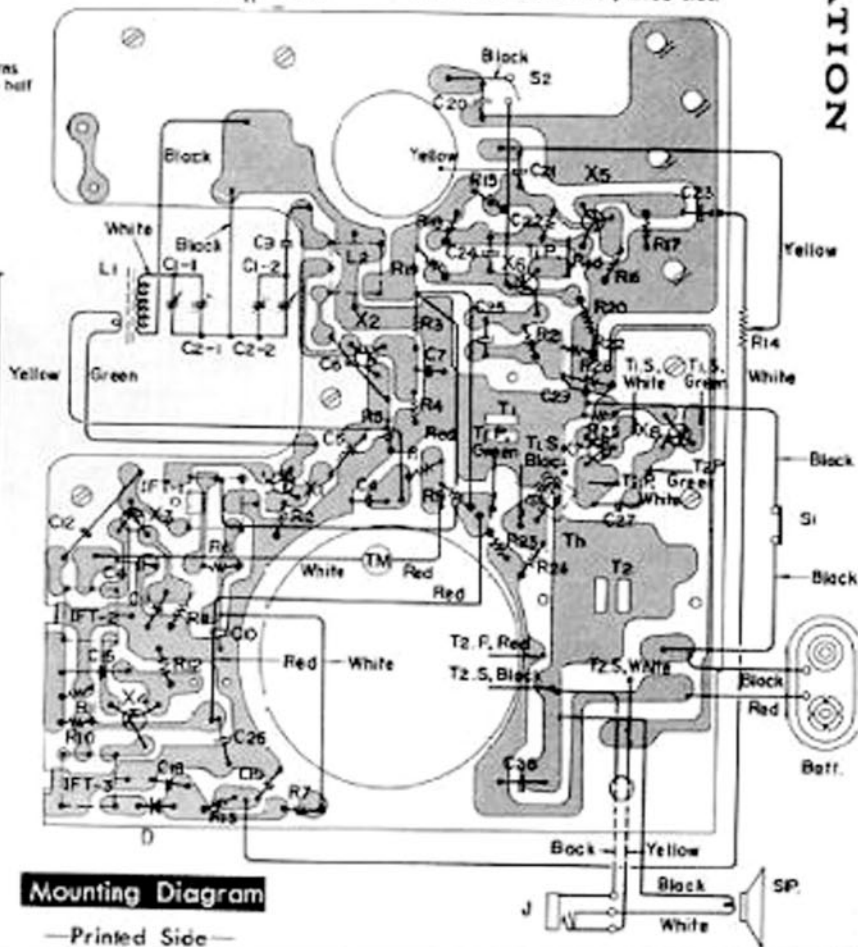

Mounting Diagram

—Printed Side—

Symbol	Description	Symbol	Description	Symbol	Description
D	Diode 1723G	R ₂₀	5.6K Ω " "	C ₁₀	10μF 3V Electrolytic
Th	Thermistor CS-123	R ₂₁	1K Ω " "	C ₁₁	0.02μF Ceramic
Resistor					
R ₁	10K Ω 1/2W Carbon	R ₂₂	1K Ω " "	C ₁₂	1PF " "
R ₂	30K Ω " "	R ₂₃	27K Ω " "	C ₁₃	150PF (built in IFT ₁)
R ₃	39K Ω 1/2W Carbon	R ₂₄	10K Ω " "	C ₁₄	0.01μF Ceramic
R ₄	5.6K Ω " "	R ₂₅	1K Ω " "	C ₁₅	0.01μF " "
R ₅	2.2K Ω " "	R ₂₆	10 Ω " "	C ₁₆	—deleted—
*R ₆	120K Ω " "	R ₂₇	220 Ω " "	C ₁₇	150PF (built in IFT ₂)
R ₇	5.6K Ω " "	R ₂₈	7.5K Ω " "	C ₁₈	0.02μF Ceramic
R ₈	470 Ω " "	R ₂₉	10 Ω " "	C ₁₉	0.01μF " "
R ₉	10K Ω " "	R ₃₀	480 Ω " "	C ₂₀	0.3μF 15V Electrolytic
R ₁₀	39K Ω " "	Capacitor		C ₂₁	10μF 3V " "
R ₁₁	3.3K Ω " "	C ₁₋₁₋₀	Tuning Capacitor, 2 gang	C ₂₂	0.005μF Nylon
R ₁₂	470 Ω " "	C ₂₋₁₋₀	Trimmer Capacitor, 2 unit	C ₂₃	10μF 3V Electrolytic
R ₁₃	1.8K Ω " "	C	0.02μF Ceramic	C ₂₄	10μF 6V " "
R ₁₄	5K Ω Volume Control	C	0.002μF Mylar	C ₂₅	30μF 3V " "
R ₁₅	36K Ω 1/2W Carbon	C	0.002μF " "	C ₂₆	30μF 10V " "
		C	0.01μF Ceramic	C ₂₇	0.01μF Ceramic
		C	130PF Styrol	C ₂₈	50μF 10V Electrolytic
		C	150PF (built in IFT ₁)	C ₂₉	0.02μF Ceramic

* To be adjusted