SANYO 8S-P8

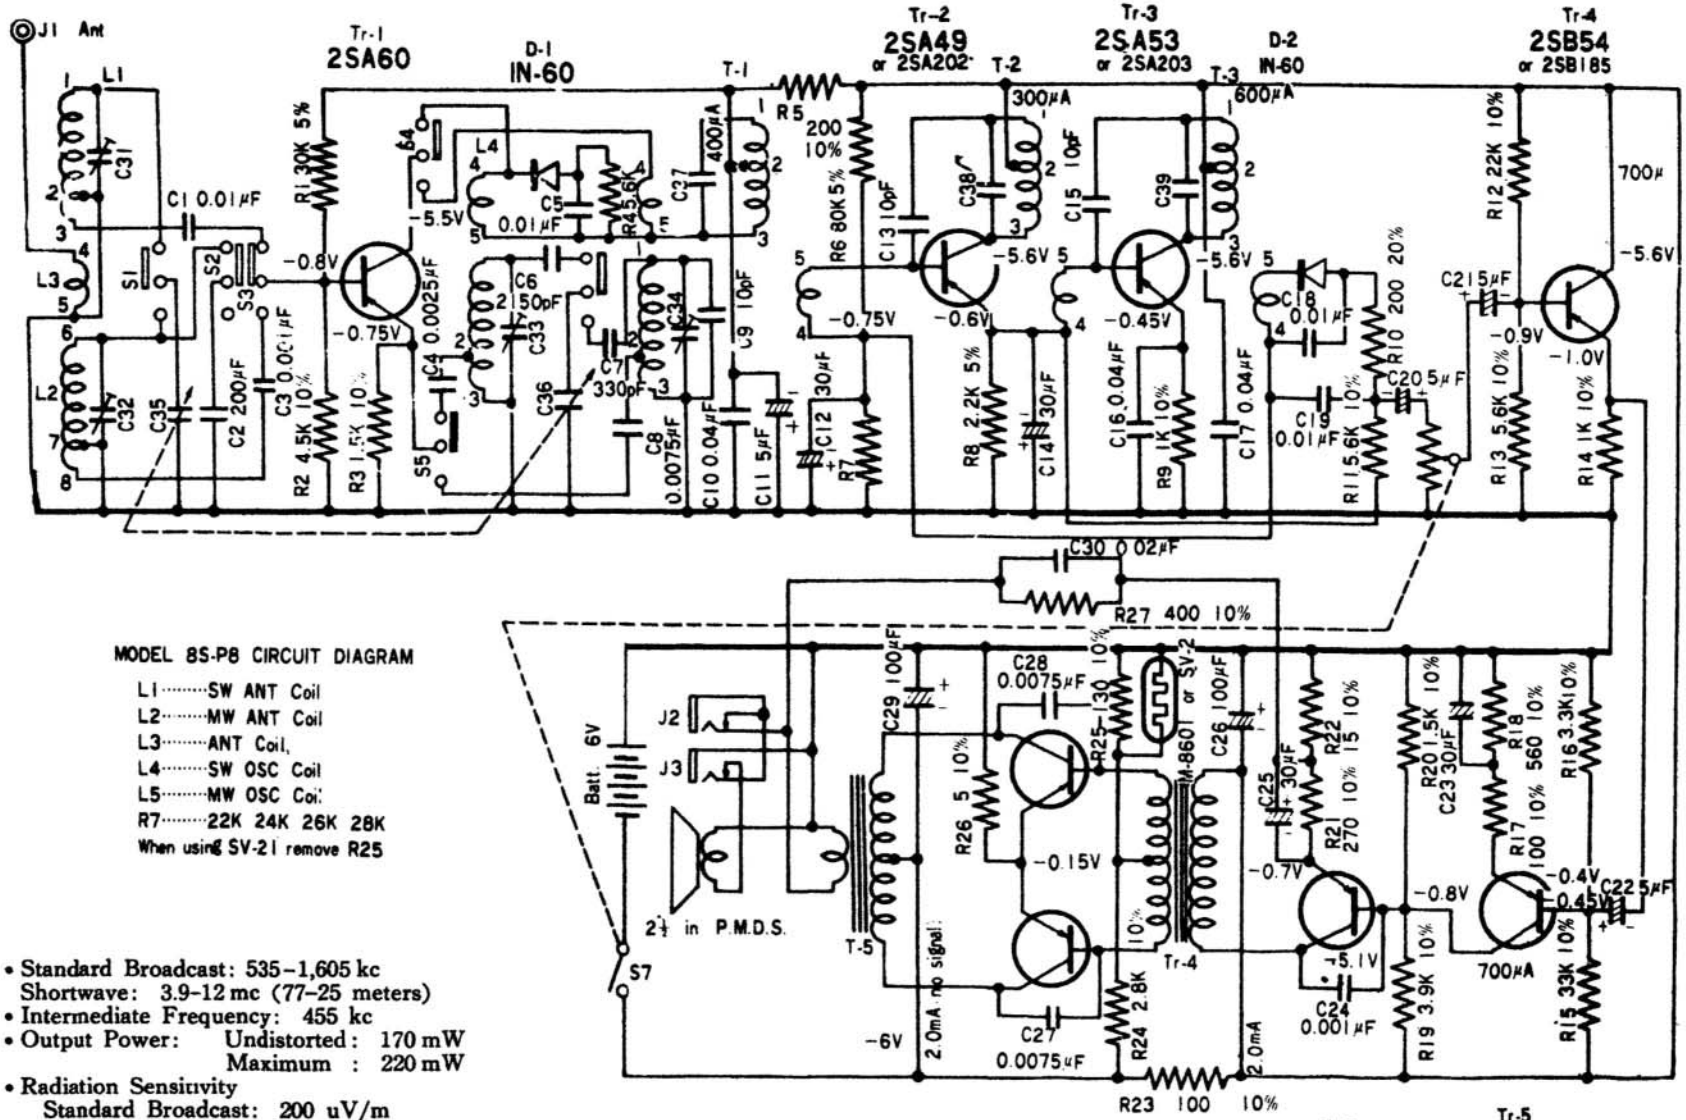

MODEL 8S-P8 CIRCUIT DIAGRAM

L1 ·····SW ANT Coil
L2 ·····MW ANT Coil
L3 ·····ANT Coil,
L4 ·····SW OSC Coil
L5 ·····MW OSC Coil
R7 ·····22K 24K 26K 28K
When using SV-21 remove R25

- Standard Broadcast: 535–1,605 kc
  Shortwave: 3.9–12 mc (77–25 meters)
- Intermediate Frequency: 455 kc
- Output Power: Undistorted: 170 mW
  Maximum : 220 mW
- Radiation Sensitivity
  Standard Broadcast: 200 uV/m
  Shortwave: 140 uV/m
  (Lower Limit for 10 mW Output)
- Speaker: 2½-inch permanent dynamic type
  Voice Coil Impedance 7 ohms at 1,000 c/s