



ソニートラック TR-831

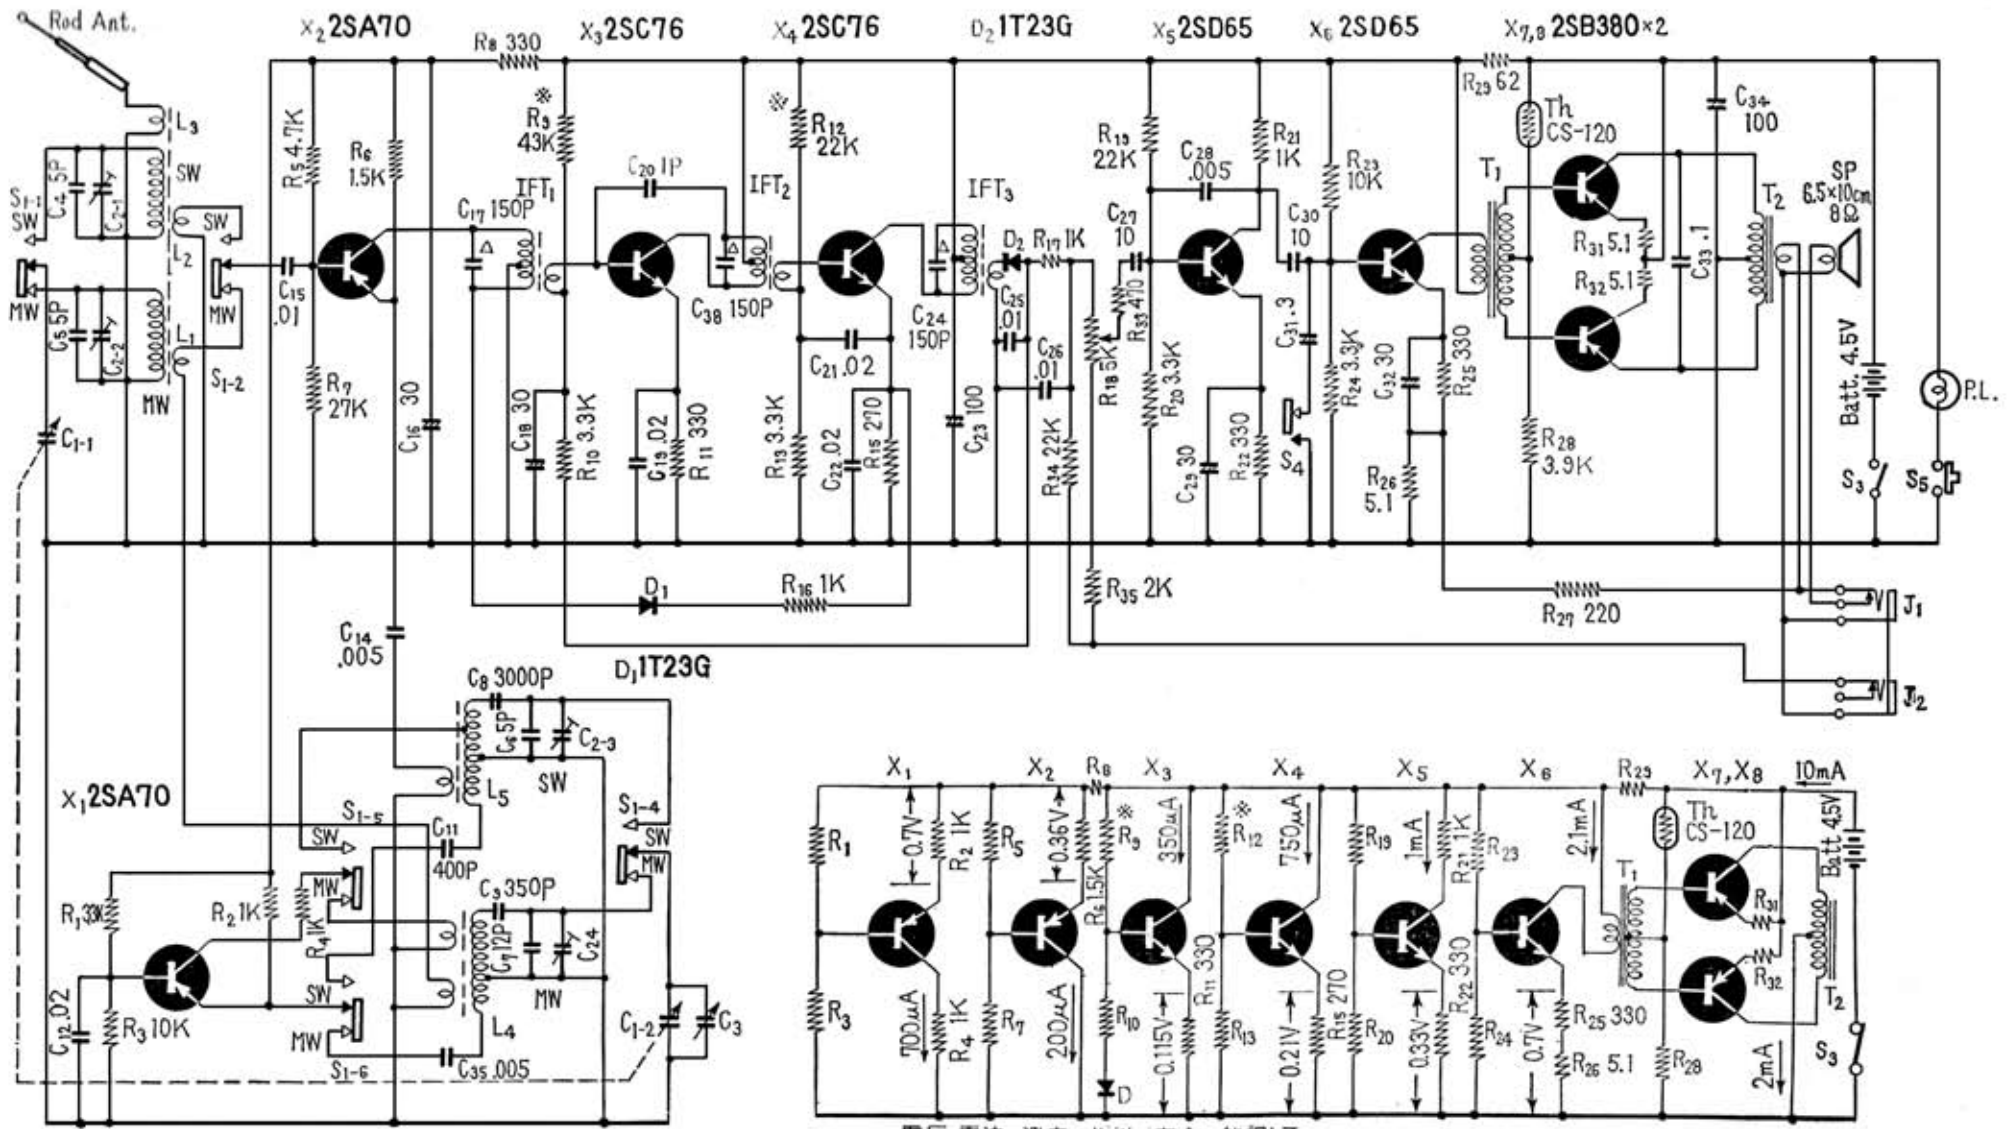

*--調整抵抗
△--IFT内蔵

電圧、電流の測定は放送を完全に離調して
音量最小の位置で行う。

SONY TR-831

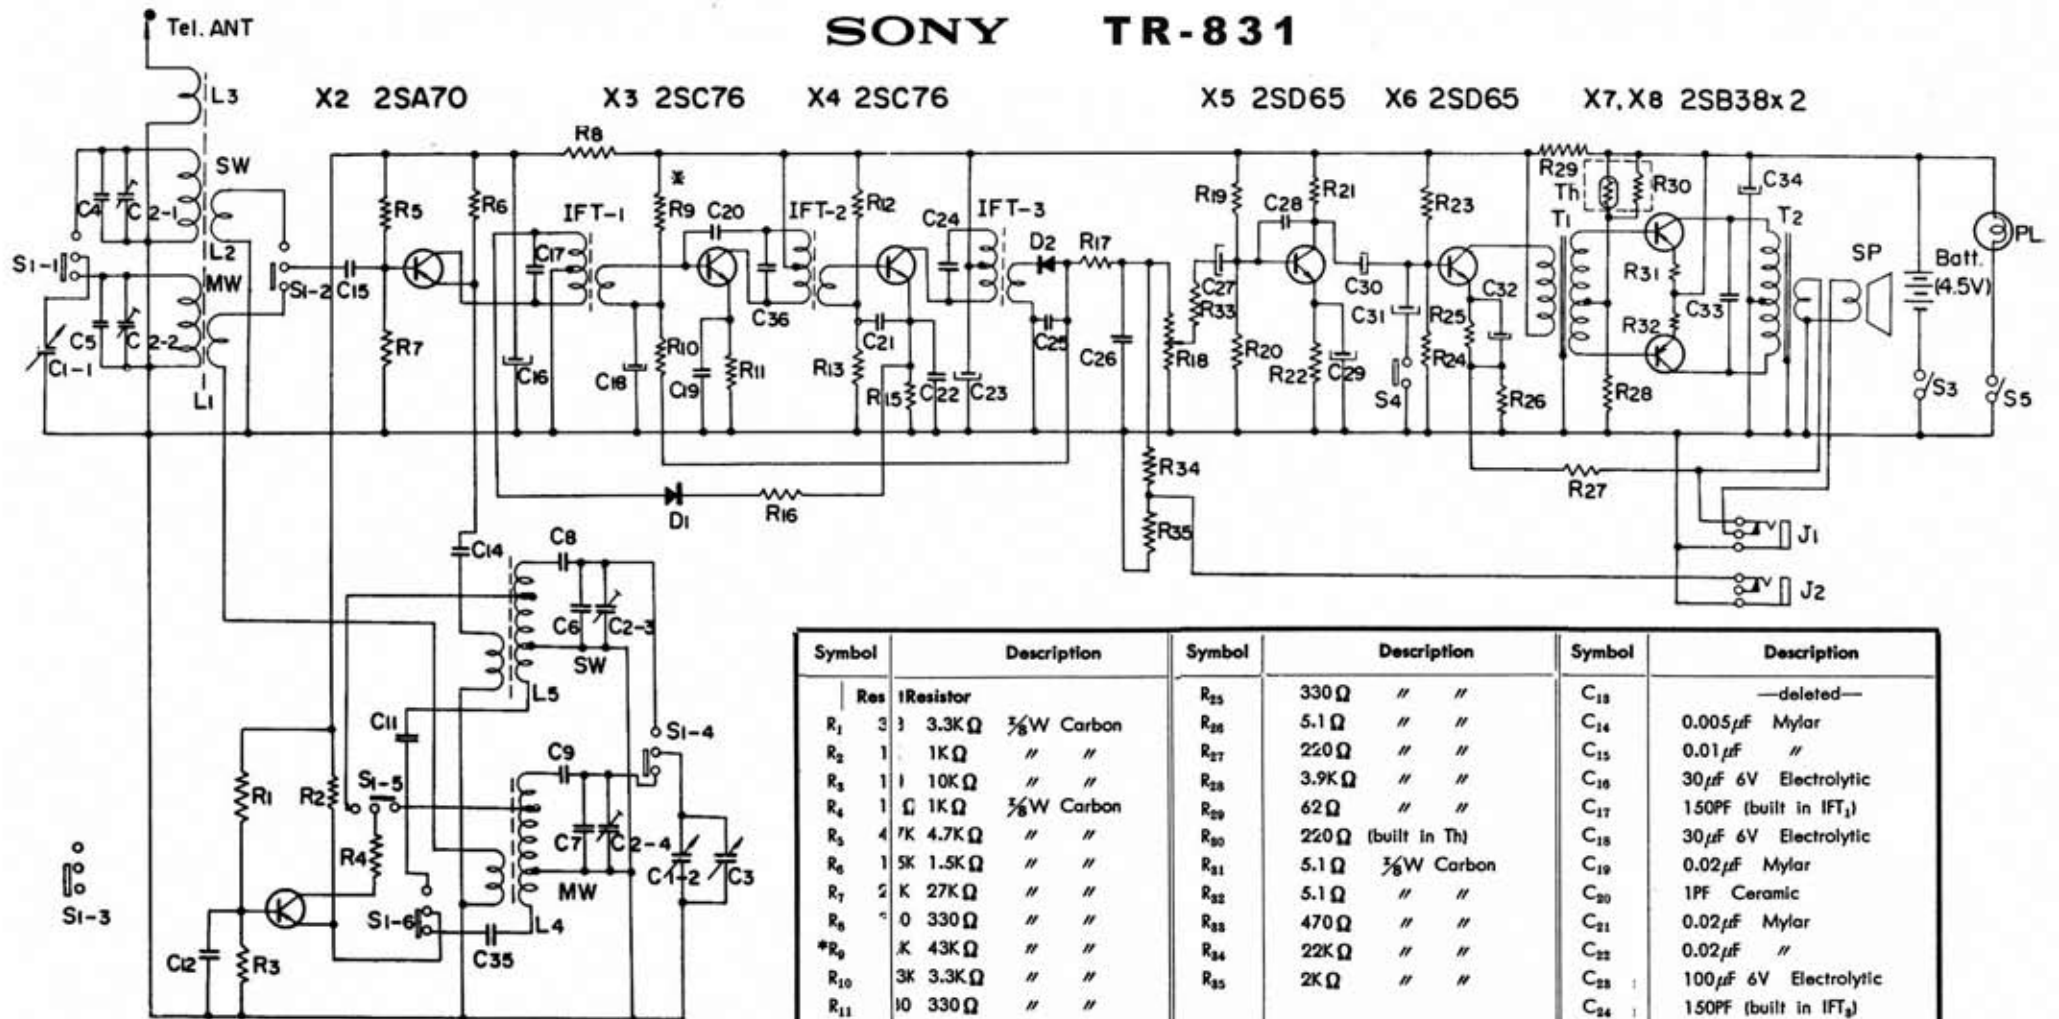

X1 2SA70

Symbol	Description	Symbol	Description	Symbol	Description
Res	Resistor	R ₂₅	330 Ω " "	C ₁₃	—deleted—
R ₁	3 3.3K Ω 3/8W Carbon	R ₂₆	5.1 Ω " "	C ₁₄	0.005 μF Mylar
R ₂	1 1K Ω " "	R ₂₇	220 Ω " "	C ₁₅	0.01 μF "
R ₃	1 10K Ω " "	R ₂₈	3.9K Ω " "	C ₁₆	30 μF 6V Electrolytic
R ₄	1 1K Ω 3/8W Carbon	R ₂₉	62 Ω " "	C ₁₇	150PF (built in IFT ₁)
R ₅	4 7K 4.7K Ω " "	R ₃₀	220 Ω (built in Th)	C ₁₈	30 μF 6V Electrolytic
R ₆	1 5K 1.5K Ω " "	R ₃₁	5.1 Ω 3/8W Carbon	C ₁₉	0.02 μF Mylar
R ₇	2 K 27K Ω " "	R ₃₂	5.1 Ω " "	C ₂₀	1PF Ceramic
R ₈	0 330 Ω " "	R ₃₃	470 Ω " "	C ₂₁	0.02 μF Mylar
*R ₉	K 43K Ω " "	R ₃₄	22K Ω " "	C ₂₂	0.02 μF "
R ₁₀	3K 3.3K Ω " "	R ₃₅	2K Ω " "	C ₂₃	100 μF 6V Electrolytic
R ₁₁	10 330 Ω " "	Capacitor		C ₂₄	150PF (built in IFT ₃)
R ₁₂	2K 22K Ω " "	C ₁	Tuning Capacitor, 2 gang	C ₂₅	0.01 μF Mylar
R ₁₃	3K 3.3K Ω " "	C ₂	Trimmer Capacitor, 4 unit	C ₂₆	0.01 μF "
R ₁₄	—deleted—	C ₃	Fine Tuning Capacitor	C ₂₇	10 μF 6V Electrolytic
R ₁₅	10 270 Ω 3/8W Carbon	C ₄	5PF Ceramic	C ₂₈	0.005 μF Mylar
R ₁₆	1K 1K Ω " "	C ₅	5PF "	C ₂₉	30 μF 6V Electrolytic
R ₁₇	1K 1K Ω " "	C ₆	5PF "	C ₃₀	10 μF 6V "
R ₁₈	5K 5K Ω Volume Control	C ₇	12PF "	C ₃₁	0.3 μF 6V " (Alox)
R ₁₉	22K 22K Ω 3/8W Carbon	C ₈	3000PF Styrol	C ₃₂	30 μF 6V "
R ₂₀	3K 3.3K Ω " "	C ₉	350PF "	C ₃₃	0.1 μF Mylar
R ₂₁	1K 1K Ω " "	C ₁₀	—deleted—	C ₃₄	100 μF 6V Electrolytic
R ₂₂	10 330 Ω " "	C ₁₁	400PF Ceramic	C ₃₅	0.005 μF Ceramic
R ₂₃	1K 10K Ω " "	C ₁₂	0.02 μF "	C ₃₆	150PF (built in IFT ₃)
R ₂₄	3K 3.3K Ω " "				